

# THICK LAYERS PLYWOODS TEXTURE




## PAGED PINE 100%

Cross build plywood. All layers are made of soft wood in thickness 2,5 to 3,2 mm depends of panel thickness.

We offer PINE 100% as a raw plywood exterior according EN-636-3

thickness	numbers of plies	thickness plies	thickness plywood mm	panel assembly - cross grain soft wood   long grain soft wood	tolerance of nominal thickness mm
9	3	- 1 x 3,2 mm 1 2 x 3,2 mm	9,6	-	8 - 9
12	5	- 2 x 2,5 mm 1 3 x 2,5 mm	12,5	-   -	10,5 - 12,0
15	5	- 2 x 3,2 mm 1 3 x 3,2 mm	16	-   -	13,5 - 14,5
18	6	- 2 x 3,2 mm 1 4 x 3,2 mm	19,2	-   -   -	16,5 - 18,5
21	7	- 3 x 3,2 mm 1 4 x 3,2 mm	22,4	-   -   -	19,5 - 21,5
24	10	- 4 x 2,5 mm 1 6 x 2,5 mm	25	-   -   -   -	22,5 - 24,5
27	9	- 4 x 3,2 mm 1 5 x 3,2 mm	28	-   -   -   -	25,5 - 27,5
30	11	- 5 x 3,2 mm 1 6 x 2,5 mm	31	-   -   -   -   -	28,5 - 30,5
35	15	- 7 x 2,5 mm 1 8 x 2,5 mm	37,5	-   -   -   -   -   -	33,5 - 35,5
40	13	- 6 x 3,2 mm 1 7 x 3,2 mm	41,6	-   -   -   -   -   -	38,5 - 40,5

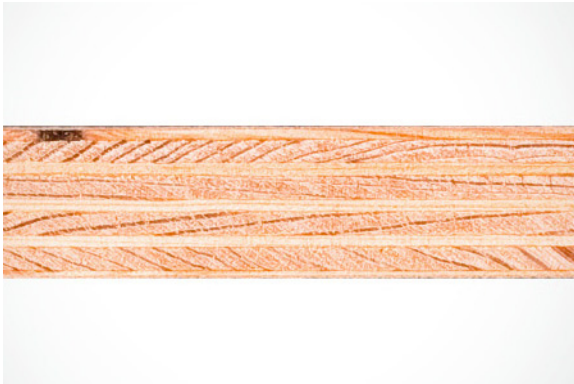

## PAGED PINE PLUS

Cross build plywood. All layers are made of soft wood in thickness 1,45 to 3,2 mm depends of panel thickness.

We offer PINE PLUS only as a raw plywood exterior according EN-636-3

thickness	numbers of plies	thickness plies	thickness plywood mm	panel assembly - cross grain soft wood   long grain soft wood	tolerance of nominal thickness mm
9	5	- 2 x 2,5 mm 1 1 x 2,5 mm 1 2 x 1,45 mm	10,4	-   -	8 - 9,5
12	5	- 2 x 3,2 mm 1 1 x 3,2 mm 1 2 x 1,45 mm	12,5	-   -	10,5 - 12,0
15	7	- 3 x 2,5 mm 1 2 x 3,2 mm 1 2 x 1,45 mm	16,8	-   -   -	13,5 - 14,5
18	7	- 3 x 3,2 mm 1 2 x 3,2 mm 1 2 x 1,45 mm	18,9	-   -   -	16,5 - 18
21	10	- 4 x 2,5 mm 1 4 x 2,5 mm 1 2 x 1,45 mm	22,9	-   -   -   -	19,5 - 21
24	11	- 5 x 2,5 mm 1 4 x 2,5 mm 1 2 x 1,45 mm	25,4	-   -   -   -   -	22,5 - 24,5
27	12	- 6 x 2,5 mm 1 4 x 2,5 mm 1 2 x 1,45 mm	27,9	-   -   -   -   -	25,5 - 27,5
30	11	- 5 x 3,2 mm 1 4 x 3,2 mm 1 2 x 1,45 mm	31,7	-   -   -   -   -	28,5 - 30,5
35/40 mm					

### DENSITY:

PAGED PINE 100%: 585-595 kg/m<sup>3</sup>

PAGED PINE PLUS: 585-595 kg/m<sup>3</sup>

### PACKING

thickness plywood	9	12	15	18	21	24	27	30	35	40	45	50
quantity in package	100	75	60	50	40	35	30	30	26	22	20	18



## PAGED TWIN FORM

Cross build Plywood raw or film faced. Product where core is made of pine veneers 2,5 - 3,2 mm, outer plies are made of birch 1,45 mm.

We offer TWIN as a film faced plywood covered with phenol film.

thickness	numbers of plies	thickness plies	thickness plywood mm	panel assembly - cross grain hard wood - cross grain soft wood   long grain soft wood	tolerance of nominal thickness mm
9	5	- 2 x 1,45 mm - 1 x 2,5 mm 12 x 2,5 mm	10,4	-   -   -	8-9
12	5	- 2 x 1,45 mm - 1 x 3,2 mm 12 x 3,2 mm	12,5	-   -   -	10,5 - 12,0
15	7	- 2 x 1,45 mm - 2 x 2,5 mm 13 x 2,5 mm	15,4	-   -   -   -	13,5 - 14,5
18	7	- 2 x 1,45 mm - 2 x 3,2 mm 13 x 3,2 mm	18,9	-   -   -   -	16,5 - 18,5
21	10	- 2 x 1,45 mm - 4 x 2,5 mm 14 x 2,5 mm	22,9	-   -   =   -   -	19,5 - 21,5
24	9	- 2 x 1,45 mm - 3 x 3,2 mm 14 x 3,2 mm	25,3	-   -   -   -   -	22,5 - 24,5
27	12	- 2 x 1,45 mm - 4 x 2,5 mm 16 x 2,5 mm	27,9	-   -   -   -   -   -	25,5 - 27,5
30	11	- 2 x 1,45 mm - 4 x 3,2 mm 15 x 3,2 mm	31,7	-   -   -   -   -   -	28,5 - 30,5
35	15	- 2 x 1,45 mm - 6 x 2,5 mm 15 x 2,5 mm 12 x 3,2 mm	36,8	-   -   -   -   -   -   -	33,5 - 35,5
40	17	- 2 x 1,45 mm - 7 x 2,5 mm 16 x 2,5 mm 12 x 3,2 mm	41,7	-   -   -   -   -   -   -   -	38,5 - 40,5



## PAGED MIRROR FORM

Cross build plywood . Product where comparing to regular raw or film faced plywood core of MIRROR is a combination of birch and pine veneers with different thickness. Outer plies are made of birch 1,45 mm and core is a combination of veneers pine 2,5 - 3,2 mm and birch 1,45 mm.

We offer MIRROR as a film faced plywood covered with phenol film.

thickness	numbers of plies	thickness plies	thickness plywood mm	panel assembly - cross grain soft wood   long grain soft wood	tolerance of nominal thickness mm
9	5	- 3 x 1,45 mm 12 x 3,2 mm	10,75	-   -   -	8 - 9,5
12	7	- 4 x 1,45 mm 13 x 2,5 mm	13,3	-   -   -   -	11 - 12,5
15	8	- 4 x 1,45 mm - 14 x 2,5 mm	15,8	-   -   -   -   -	14,3 - 15,3
15	7	- 2 x 1,45 mm - 2 x 1,45 mm 13 x 3,2 mm	15,4	-   -   -   -	13,5 - 14,5
18	9	- 5 x 1,45 mm 12 x 3,2 mm 12 x 3,2 mm	20,05	-   -   -   -   -	17,1 - 18,1
21	11	- 6 x 1,45 mm 15 x 2,5 mm lub 5 x 2,8 mm	21,2 22,7	-   -   -   -   -   -	20 - 20,9
24	13	- 7 x 1,45 mm 16 x 2,5 mm	25,15	-   -   -   -   -   -   -	22,5 - 24,5
27	13	- 7 x 1,45 mm 14 x 3,2 mm 12 x 2,5 mm	27,95	-   -   -   -   -   -   -	25,5 - 27,5
30	16	- 8 x 1,45 mm 18 x 2,5 mm	31,2	-   -   -   -   -   -   -   -	28,5 - 30,5
35	16	- 8 x 1,45 mm 18 x 3,2 mm	36,25	-   -   -   -   -   -   -   -	33,5 - 35,5
40	21	- 11 x 1,45 mm 110 x 2,5 mm	40,95	-   -   -   -   -   -   -   -   -   -	38,5 - 40,5

### DENSITY:

PAGED TWIN FORM: 635-645 kg/m<sup>3</sup>

PAGED MIRROR FORM: 645-655 kg/m<sup>3</sup>

### PACKING

Grubość sklejek	9	12	15	18	21	24	27	30	35	40
Ilość sztuk w paczce	95	70	55	45	40	35	30	28	21	17